



嵌装透镜防眩灯具

Recessed Lamps with Optical Lens

## 嵌装透镜防眩灯具 Recessed Lamps with Optical Lens



709Q.U  
215-216



925Q  
217-218




927Q  
219-220



929-2Q  
221-222

# 709Q.U Series

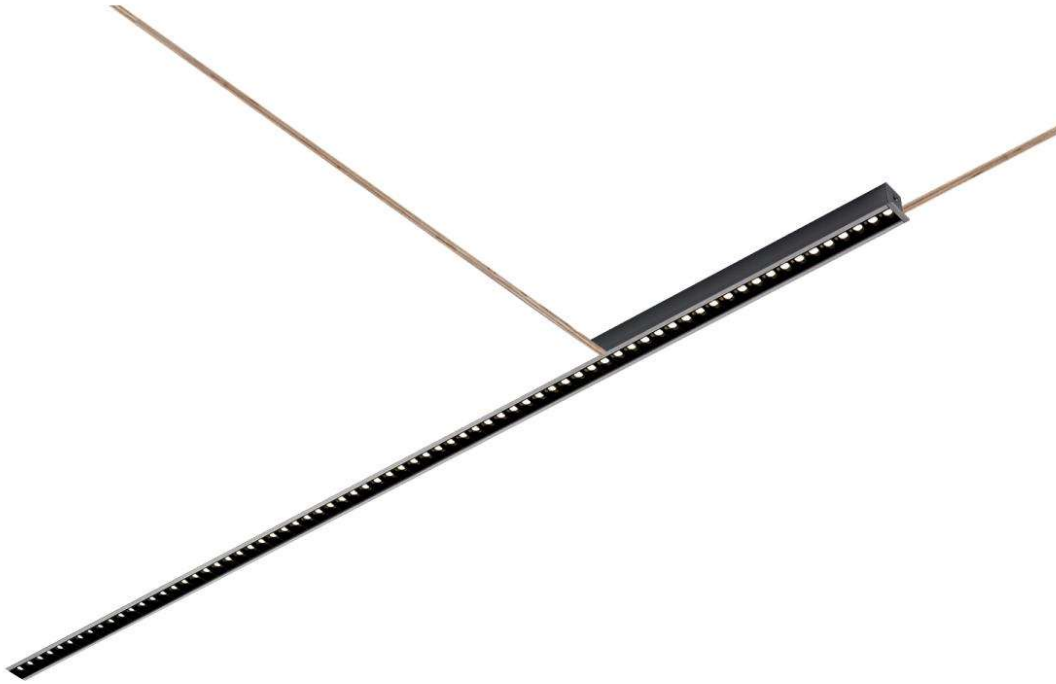

## 材质与工艺 Material & technology

名称	RL01
型号	709Q.U
电压配置可选	恒流/24V恒压方案可选
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	U防眩透镜系列发光角度25°/60°/15°&抗UV乳白棱纹光扩散面罩
光源	LED-SMD模块高光效输出
照明方式	下发光
显色指数	≥80/≥90
色温	3000K/4000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦/莱福德等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	RL01
Model	709Q.U
Voltage configuration optional	constant current/24V constant voltage
Body Material	Aluminum alloy(6063)
Body Finish	White/Black
Diffuser	U series anti-glare lens (Beam angle: 25°/60°/15°) & UV resistant opal prismatic diffuser
Light source	High luminous efficiency LED-SMD module
Light distribution	Direct light
Color rendering	≥80/≥90
CCT	3000K/4000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee






Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim



0-10v控制  
0-10v dim

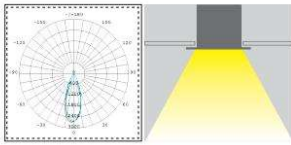


灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
300*32*30	709Q.HU305E	L 9W	900Lm	25°,60°,15°
		M 12W	1200Lm	
		H 15W	1500Lm	
588*32*30	709Q.HU605E	L 18W	1800Lm	25°,60°,15°
		M 24W	2400Lm	
		H 30W	3000Lm	
876*32*30	709Q.HU905E	L 27W	2700Lm	25°,60°,15°
		M 36W	3600Lm	
		H 45W	4500Lm	
1164*32*30	709Q.HU1205E	L 36W	3600Lm	25°,60°,15°
		M 48W	4800Lm	
		H 60W	6000Lm	
1452*32*30	709Q.HU1505E	L 45W	4500Lm	25°,60°,15°
		M 60W	6000Lm	
		H 75W	7500Lm	
1740*32*30	709Q.HU1805E	L 54W	5400Lm	25°,60°,15°
		M 72W	7200Lm	
		H 90W	9000Lm	
2316*32*30	709Q.HU2405E	L 72W	7200Lm	25°,60°,15°
		M 94W	9400Lm	
		H 120W	12000Lm	

无暗区组合参数-配置SMD模组 Shadowless connect specifications -with SMD module



灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
300*300*32*30	709QW.HU205E(L)	L 6W	600Lm	25°,60°,15°
		M 8W	800Lm	
		H 10W	1000Lm	

对应安装尺寸参考(具体以实物为准) Installation size reference (Please refer to the actual product for details)

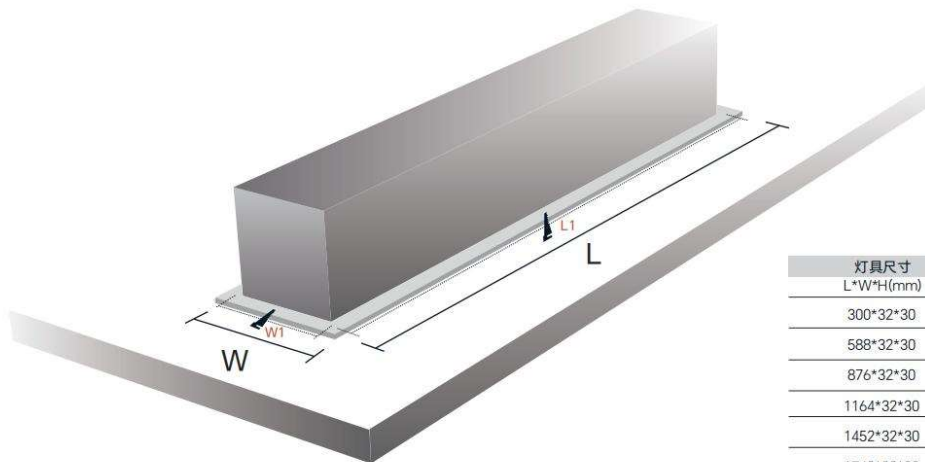


灯具尺寸 L*W*H(mm)	开槽尺寸 L*W*H(mm)
300*32*30	294*28
588*32*30	582*28
876*32*30	870*28
1164*32*30	1158*28
1452*32*30	1446*28
1740*32*30	1734*28
2316*32*30	2310*28

产品色温可选 Optional color temperature

LED 3000K | 4000K

# 925Q Series

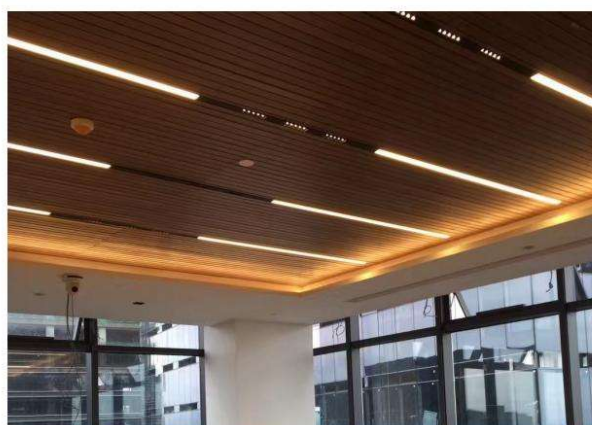

## 材质与工艺 Material & technology

名称	RL02
型号	925Q.G
电压配置可选	恒流方案
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	G防眩透镜系列发光角度50°/38°&抗UV乳白棱纹光扩散面罩
光源	LED-SMD模块高光效输出
照明方式	下发光
显色指数	≥80/≥90
色温	3000K/4000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦/莱福德等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	RL02
Model	925Q.G
Voltage configuration optional	constant current
Body Material	Aluminum alloy(6063)
Body Finish	White/Black
Diffuser	G series anti-glare lens (Beam angle: 50°/38°) & UV resistant opal prismatic diffuser
Light source	High luminous efficiency LED-SMD module
Light distribution	Direct light
Color rendering	≥80/≥90
CCT	3000K/4000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee



Dali调光控制  
DALI-DT6 dim






Dali调光调色控制  
DALI-DT8 CCT tunable & dim



0-10v控制  
0-10v dim



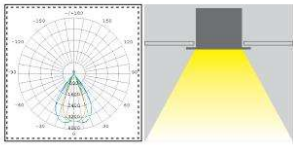


灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
392*50*35	925Q.HG210E	L 10W	1000Lm	50°,38°
		M 14W	1400Lm	
		H 18W	1800Lm	
582*50*35	925Q.HG310E	L 15W	1500Lm	50°,38°
		M 21W	2100Lm	
		H 27W	2700Lm	
962*50*35	925Q.HG510E	L 25W	2500Lm	50°,38°
		M 35W	3500Lm	
		H 35W	3500Lm	
1152*50*35	925Q.HG610E	L 30W	3000Lm	50°,38°
		M 42W	4200Lm	
		H 54W	5400Lm	
1342*50*35	925Q.HG710E	L 35W	3500Lm	50°,38°
		M 49W	4900Lm	
		H 63W	6300Lm	
1722*50*35	925Q.HG910E	L 45W	4500Lm	50°,38°
		M 63W	6300Lm	
		H 81W	8100Lm	
2292*50*35	925Q.HG1210E	L 60W	6000Lm	50°,38°
		M 84W	8400Lm	
		H 108W	10800Lm	

无暗区组合参数-配置SMD模组 Shadowless connect specifications -with SMD module



灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
300*300*50*35	925QW.HG210E(L)	L 10W	1000Lm	50°,38°
		M 14W	1400Lm	
		H 18W	1800Lm	

对应安装尺寸参考(具体以实物为准) Installation size reference (Please refer to the actual product for details)

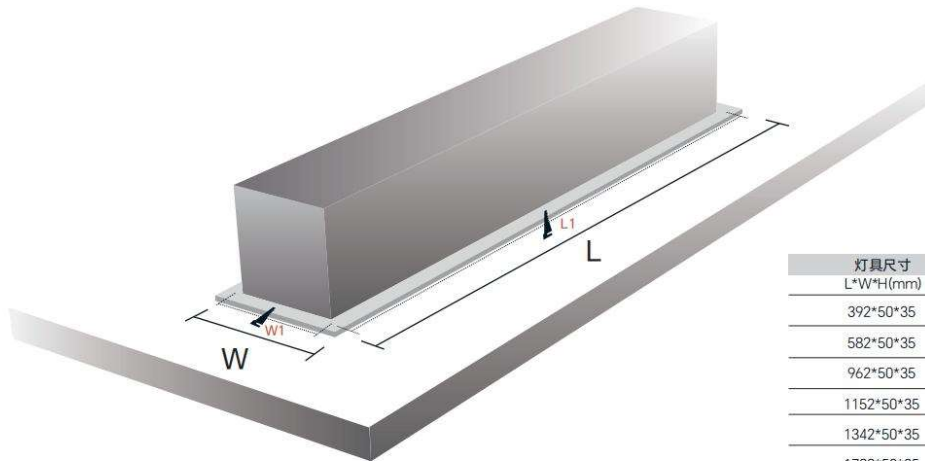


灯具尺寸 L*W*H(mm)	开槽尺寸 L*W*H(mm)
392*50*35	386*45
582*50*35	576*45
962*50*35	956*45
1152*50*35	1146*45
1342*50*35	1336*45
1722*50*35	1716*45
2292*50*35	2286*45

产品色温可选 Optional color temperature

LED 3000K | 4000K

# 927Q Series

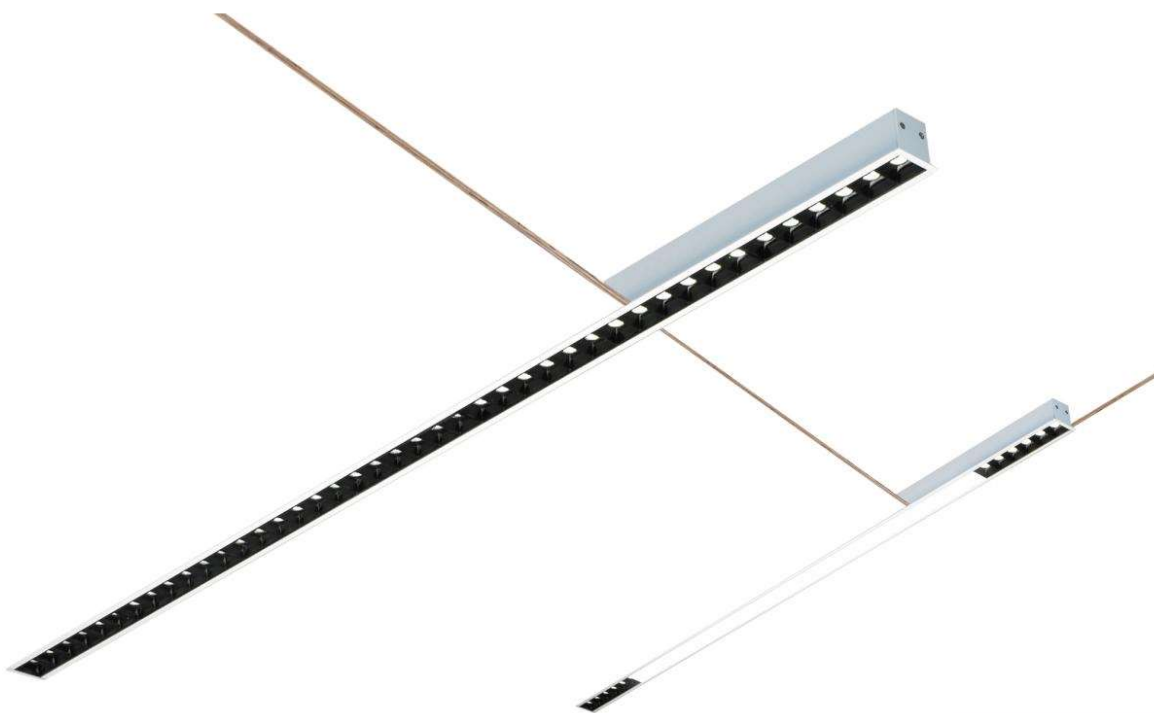


## 材质与工艺 Material & technology

名称	RL03
型号	927Q
电压配置可选	恒流/24V恒压方案可选
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	S防眩透镜系列发光角度48°/34°/12°&抗UV乳白棱纹光扩散面罩
光源	LED-SMD模块高光效输出
照明方式	下发光
显色指数	≥80/≥90
色温	3000K/4000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦/莱福德等品牌
控制方式	ON/OFF,0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	RL03
Model	927Q
Voltage configuration optional	constant current/24V constant voltage
Body Material	Aluminum alloy(6063)
Body Finish	White/Black
Diffuser	S series anti-glare lens (Beam angle: 48°/34°/12°) & UV resistant opal prismatic diffuser
Light source	High luminous efficiency LED-SMD module
Light distribution	Direct light
Color rendering	≥80/≥90
CCT	3000K/4000K
Driver	High efficiency driver,using brands such as Tridonic/Philips
Control Way	ON/OFF,0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee






Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim



0-10v控制  
0-10v dim

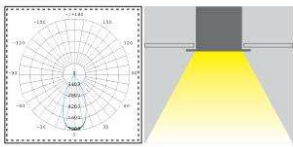


灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
328*42*40	927Q.HS205E	L 6W	600Lm	48°,34°,12°
		M 8W	800Lm	
		H 10W	1000Lm	
646*42*40	927Q.HS405E	L 12W	1200Lm	48°,34°,12°
		M 16W	1600Lm	
		H 20W	2000Lm	
964*42*40	927Q.HS605E	L 18W	1800Lm	48°,34°,12°
		M 24W	2400Lm	
		H 30W	3000Lm	
1123*42*40	927Q.HS705E	L 21W	2100Lm	48°,34°,12°
		M 28W	2800Lm	
		H 35W	3500Lm	
1141*42*40	927Q.HS905E	L 27W	2700Lm	48°,34°,12°
		M 36W	3600Lm	
		H 45W	4500Lm	
1600*42*40	927Q.HS1005E	L 30W	3000Lm	48°,34°,12°
		M 40W	4000Lm	
		H 50W	5000Lm	
2395*42*40	927Q.HS1505E	L 45W	4500Lm	48°,34°,12°
		M 60W	6000Lm	
		H 75W	7500Lm	

无暗区组合参数-配置SMD模组 Shadowless connect specifications -with SMD module



灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
300*300*42*40	927QW.HS205E(L)	L 6W	600Lm	48°,34°,12°
		M 8W	800Lm	
		H 10W	1000Lm	

对应安装尺寸参考(具体以实物为准) Installation size reference (Please refer to the actual product for details)

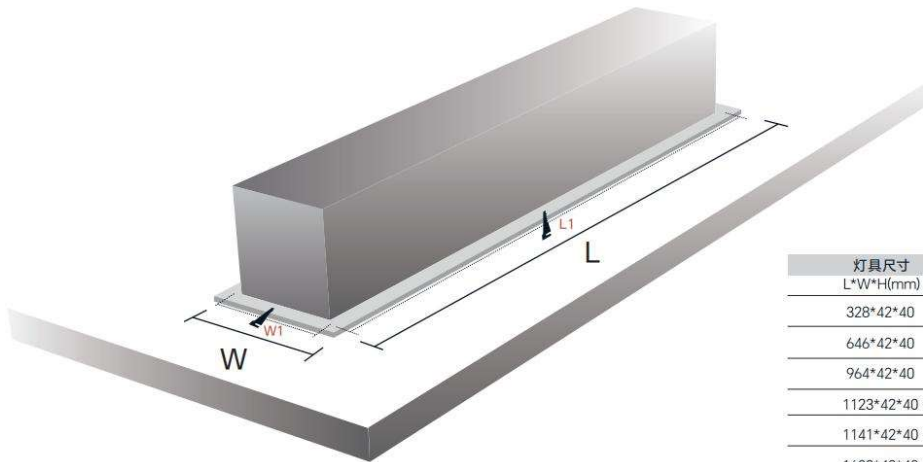


灯具尺寸 L*W*H(mm)	开槽尺寸 L*W*H(mm)
328*42*40	324*38
646*42*40	642*38
964*42*40	960*38
1123*42*40	1119*38
1141*42*40	1438*38
1600*42*40	1596*38
2395*42*40	2391*38

产品色温可选 Optional color temperature

LED 3000K | 4000K



# 929-2Q Series

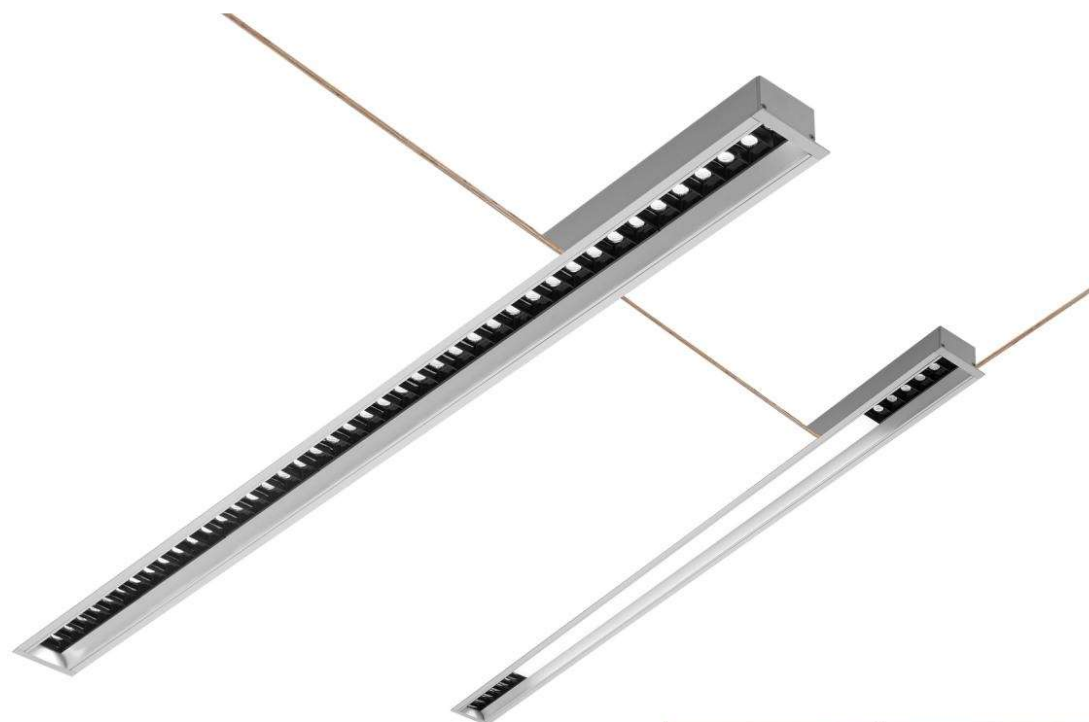

## 材质与工艺 Material & technology


名称	RL05
型号	929-2Q
电压配置可选	恒流方案
灯体材料	优质阳极氧化铝 (6063合金)
表面处理	哑白色/哑黑色
控光面罩	深层防眩配合S防眩透镜系列发光角度 48°/34°/12°&抗UV乳白棱纹光扩散面罩
光源	LED-SMD模块高光效输出
照明方式	下发光
显色指数	≥80/≥90
色温	3000K/4000K
驱动电源	高性能高转换率驱动, 锐高/飞利浦/莱福德等品牌
控制方式	ON/OFF, 0-10V调光, DALI调光, DALI调光调色, 遥控, 蓝牙等
电气等级	I
IP	20

Name	RL05
Model	929-2Q
Voltage configuration optional	constant current
Body Material	Aluminum alloy(6063)
Body Finish	White/Black
Diffuser	Recessed inside structure with S series anti-glare lens (Beam angle: 48°/34°/12°) & UV resistant opal prismatic diffuser
Light source	High luminous efficiency LED-SMD module
Light distribution	Direct light
Color rendering	≥80/≥90
CCT	3000K/4000K
Driver	High efficiency driver, using brands such as Tridonic/Philips
Control Way	ON/OFF, 0-10V dim, DALI dim, DALI tunable white, Remote control, blueooth.
Electrical grade	I
IP	20

## 可选控制方式 Optional control mode



开关控制  
Switch control



遥控控制  
Remote control



手机蓝牙控制  
Bluetooth or Zigbee







Dali调光控制  
DALI-DT6 dim



Dali调光调色控制  
DALI-DT8 CCT tunable & dim




0-10v控制  
0-10v dim

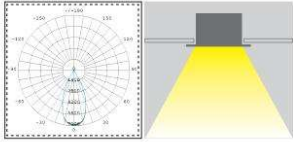

灯具尺寸 L*W*H(mm)	订货型号 Item No	功率 Power(W)	流明 Lm	角度 Beam angle
340*75*47	929-2Q.HS205E	L 6W	600Lm	48°,34°,12°
		M 8W	800Lm	
		H 10W	1000Lm	
658*75*47	929-2Q.HS405E	L 12W	1200Lm	48°,34°,12°
		M 16W	1600Lm	
		H 20W	2000Lm	
976*75*47	929-2Q.HS605E	L 18W	1800Lm	48°,34°,12°
		M 24W	2400Lm	
		H 30W	3000Lm	
1135*75*47	929-2Q.HS705E	L 21W	2100Lm	48°,34°,12°
		M 28W	2800Lm	
		H 35W	3500Lm	
1453*75*47	929-2Q.HS905E	L 27W	2700Lm	48°,34°,12°
		M 36W	3600Lm	
		H 45W	4500Lm	
1612*75*47	929-2Q.HS1005E	L 30W	3000Lm	48°,34°,12°
		M 40W	4000Lm	
		H 50W	5000Lm	
2407*75*47	929-2Q.HS1505E	L 45W	4500Lm	48°,34°,12°
		M 60W	6000Lm	
		H 75W	7500Lm	

对应安装尺寸参考(具体以实物为准) Installation size reference (Please refer to the actual product for details)

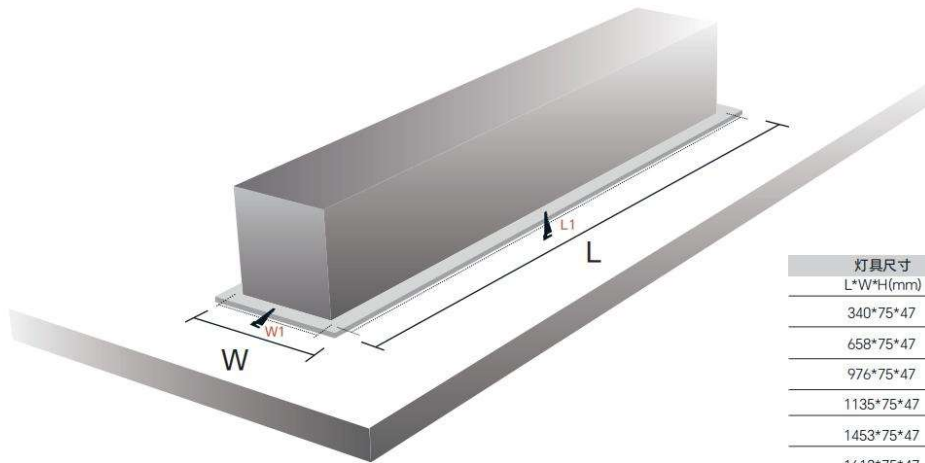

灯具尺寸 L*W*H(mm)	开槽尺寸 L*W*H(mm)
340*75*47	330*65
658*75*47	648*65
976*75*47	966*65
1135*75*47	1125*65
1453*75*47	1443*65
1612*75*47	1602*65
2407*75*47	2397*65

产品色温可选 Optional color temperature

LED 3000K | 4000K

®  
**雄宇办公照明**  
**XIONGYU** **XLinear**®  
OFFICE LIGHTING

**浙江摩灯照明科技有限公司**  
ZHEJIANG MODENG LIGHTING TECHNOLOGY CO.,LTD

地址:浙江省温州市瓯海区瞿溪街道东化路66号  
电话:86-577-88760099 / 89768558 / 88767668

Add:No.66 DonghuaRoad,Quxi street, OuhaiDistrict,  
Wenzhou City,Zhejiang Province  
Tel:86-577-88760099 / 89768558 / 88767668  
[www.chinaxiongyu.com](http://www.chinaxiongyu.com)  
[www.xlinear.cn](http://www.xlinear.cn)  
[export1@chinaxiongyu.com](mailto:export1@chinaxiongyu.com)  
[jane@xlinear.cn](mailto:jane@xlinear.cn) [coco@xlinear.cn](mailto:coco@xlinear.cn)

所有数据来源于浙江摩灯照明，如有任何印刷错误或翻译误差，敬请广大用户谅解。产品设计与规格如有更改，请以实际产品为准，恕不另行通知。部分产品已申请专利，仿冒必究！

如有疑问，敬请垂询我公司的销售代表或客户服务代表，或访问我公司网站以获取更多信息。

All technical data are from Modeng Lighting. If there are any typographical errors or translation inaccuracies, we hope for your kind understanding. Any changes in product design or technical specifications will follow the actual products and may occur without prior notice. Some products are patent-protected, and infringement will be prosecuted. Should you have any further questions, please feel free to contact our sales representatives or customer service representatives, or visit our website for more information.



了解更多详情  
请扫描官网二维码

